
SRA Series

Production Suite Application

SRA 4075 | SRA 4150 January 2010

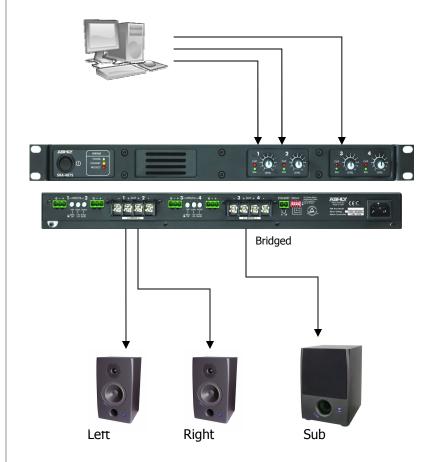

Features:

- Four Channel Power Amplifiers SRA 4075 (75W @ 4 ohms) SRA 4150 (150W @ 4 ohms)
- Convection Cooling no fan – no fan noise
- Extremely Low Noise
- Easy and Intuitive User Interface
- Euroblock Inputs selectable input sensitivity selectable high-pass filter
- Screw Terminal Outputs normal or bridge mode
- Extensive Protection Circuitry
- Remote Power On/Off
- Adjustable Turn-On Delay

Need a small, quiet power amplifier for the video production suite? 100W is more than enough, space is at a premium and fan noise is unacceptable. A four-channel Ashly SRA-Series power amplifier can drive 4-ohms of stereo loudspeakers and an 8-ohm subwoofer from only 1RU.

Ashly's **SRA-Series** power amplifiers utilize state-of-the-art technology to create advanced, efficient amplifiers that are perfect for installations with modest power needs.

All models are 1RU (1.75") and weigh a mere 10 lbs or less. Convection cooling and an extremely low noise floor will allow these amplifiers to be physically located anywhere. Each channel can be configured as a stand-alone output or pairs can be bridged. Each channel has a front panel level control, status LEDs and a high-pass filter (80Hz / off).

Visit www.ashly.com to download Protea software and data sheets